

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
3 November 2005 (03.11.2005)

PCT

(10) International Publication Number  
**WO 2005/102509 A1**

(51) International Patent Classification<sup>7</sup>: **B01J 19/00**

(21) International Application Number:  
PCT/EP2004/050620

(22) International Filing Date: 27 April 2004 (27.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **AGILENT TECHNOLOGIES, INC.** [US/US]; 395 Page Mill Road, Palo Alto, CA 94306 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BÄUERLE, Martin** [DE/DE]; Sandbuckelweg 27A, 77830 Bühlertal (DE). **EICKHOFF, Jan** [DE/DE]; Erlenweg 16, 75334 Straubenhardt (DE).

(74) Agent: **BARTH, Daniel**; Herrenberger Str. 130, 71034 Böblingen (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MICROFLUIDIC CONNECTION

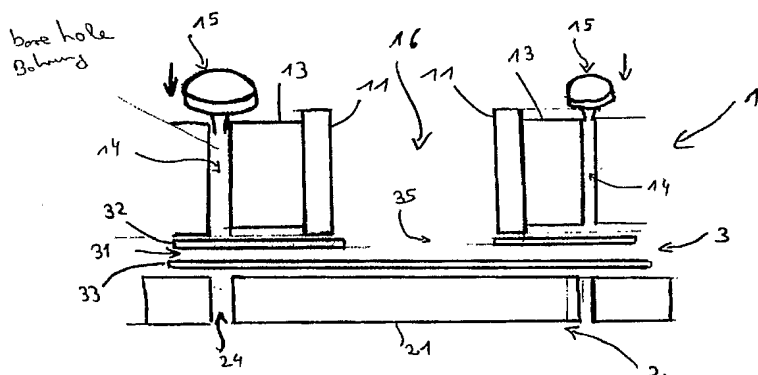

(57) Abstract: A microfluidic connection comprising a carrier element (3) having a microfluidic channel (31) fixed between a feeding element (1) and a backplate (2). The feeding element (1) comprises a channel (16) adopted for feeding a fluid into the microfluidic channel (31) of the carrier element (3).

WO 2005/102509 A1